

Specifications

Shaft: Anodizing quality extruded aluminum 6005 T5 alloy 35,000 PSI yield strength with an internal race way that provides strength, rigidity and transfers all associated loading into the corners. Our decorative posts are never welded. Instead, a mechanical compression method of joining components is utilized to take advantage of the full yield strength. All internal fasteners carry 500 hour salt spray plating. Access to aluminum grounding lug via a 2" x 5" hand hole opening with a gasketed cover and 2 stainless steel fasteners.

Finish: Four stage chromate conversion processed pre-treatment with rock-hard oven baked painted finish providing superior appearance and durability even in the harshest and coastal applications. Optional powder-coating and hard color anodized finishes available.

Base: Cast aluminum 713 alloy base designed to exceed the maximum pole loading. Unique integrated theft-proof one piece base cover is factory installed

Anchor: The hot-dipped, galvanized "J-Bolts" and wooden positioning template ensure proper alignment with every pour.

Warranty: Twenty year comprehensive mechanical structural warranty. Three year Finish and material warranty. All warranties are limited to replacement and/or repair.

Electrical: Single GFI duplex receptacle and rugged water tight cover is standard. Optional additional GFI and 20 amp Marine twist lock receptacle. Line voltage (120) medium base lamp holder to accept an incandescent lamp (60w max.) or 4w LED modul (PPM2 and PPM3 only)



Listed for Wet Location



PPM1
PPM2



Lamp Wattage

(IN) Incandescent 60w max
(LD) LED - 4 watt standard



Options

(RCTL) Single GFI
(RCTL2) Twin GFI 180 degrees
(MSP) 20 amp Marine Shore-power connector




Color / Finish

Powder Coat
White (WHI)
Black (MBK)
Bronze (BZS)
Special (SPC)


Anodizing
Clear (CLA)
Black (MBA)
Bronze (BZA)

PPM

Architectural Marine Grade
Power Pedistells
Illuminated / Non-Illuminated

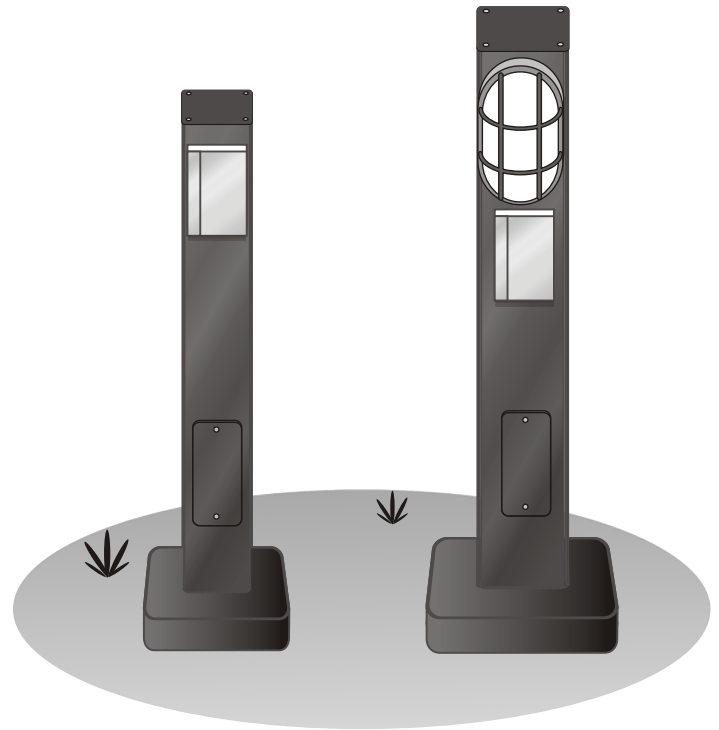


Bolt Down or Concrete Pour Applications

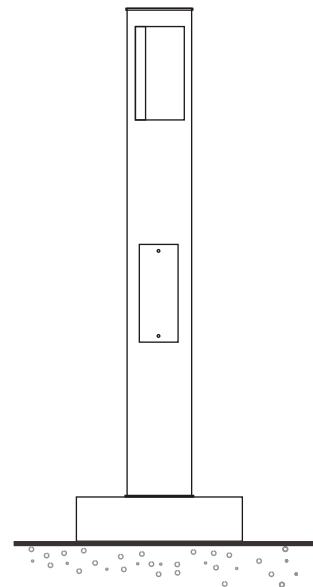


Pappi Lighting

World Class Luminaires and Poles

Power Pedestal Dimensions

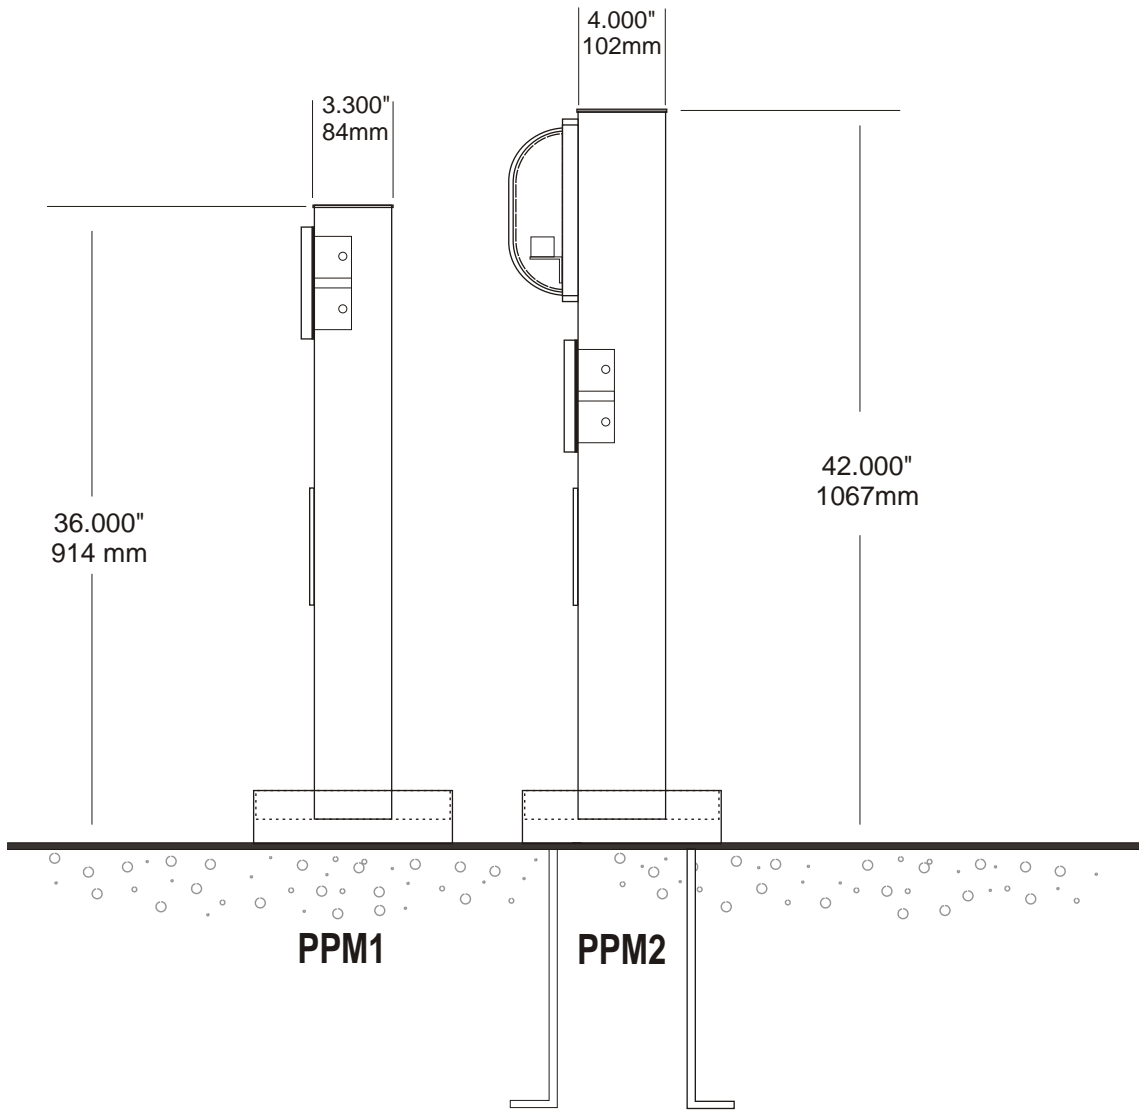

Anchor Bolt Circle Diameter Details.

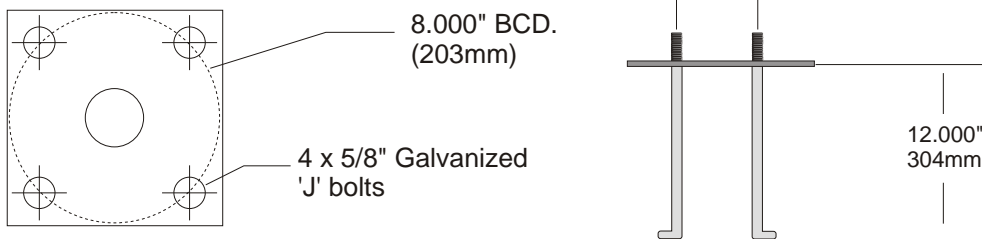

Pappi Lighting

www.pappilighting.com

Tel: 888-453-1139 Fax: 866-720-3015

Pappi Lighting reserves the right to make product changes without prior notification