

Electrical

Advance constant current electronic drivers multi voltage meets UL 1310 / UL48 Class 2 with a built-in over-temperature protection. Input voltage from 100-277. 347 and 480 volt is available (VAC 50-60Hz) Certified and tested to the North American UL 1598C LED Conversion Standard.

Lamping


Phillips Luxeon light emitting diodes (LED) mounted on heavy weight metal modular boards utilizing wire to board push-in connectors. Optical Quality Polymethyl Methacrylate (PMMA) Optics provide wide coverage uniform lighting distributions available in I.E.S. distributions : type 2, 3, 4, 5

ENVIRONMENTAL FEATURES

- *Contains no mercury or lead
- *Does not produce UV rays
- *Does not attract insects
- *Directional light means no light pollution


FEATURED HIGHLIGHTS

- *Unlimited application possibilities due to retrofitting
- *Saves up to 79% of energy consumption
- *70,000 hour life span 5yr. Manufacturers warranty
- *Return on Investment between 12 to 24 months.



Squareline HID

Light Emitting Diode Retrofit Conversion Kit.

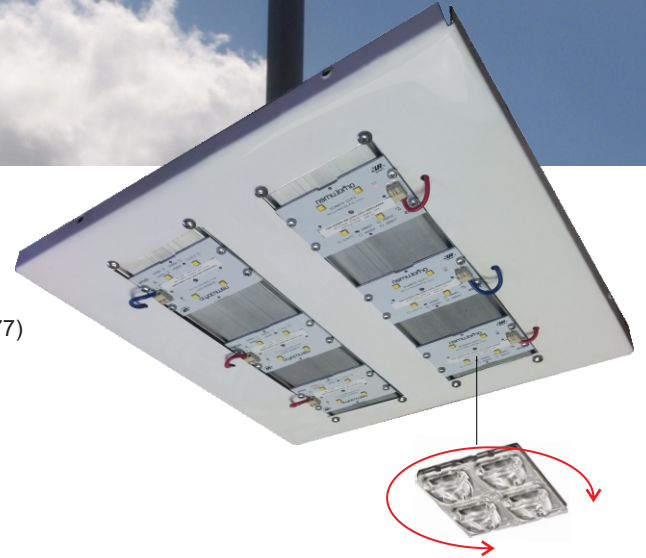

Rotatable Optics

Mini Square HID luminaire	Wattage Distribution	LED Color	Voltage
RK-MSQL			
48 watt LED Type 2	(48LED 2)	4000K	MT (120-277) 347 480
48 watt LED Type 3	(48LED 3)		
48 watt LED Type 4	(48LED 4)		
48 watt LED Type 5	(48LED 5)		
60 watt LED Type 2	(60LED 2)	4000K	MT (120-277) 347 480
60 watt LED Type 3	(60LED 3)		
60 watt LED Type 4	(60LED 4)		
60 watt LED Type 5	(60LED 5)		

Mid Square HID luminaire	Wattage Distribution	LED Color	Voltage
RK-MDQL			
60 watt LED Type 2	(60LED 2)	4000K	MT (120-277) 347 480
60 watt LED Type 3	(60LED 3)		
60 watt LED Type 4	(60LED 4)		
60 watt LED Type 5	(60LED 5)		
96 watt LED Type 2	(96LED 2)	4000K	MT (120-277) 347 480
96 watt LED Type 3	(96LED 3)		
96 watt LED Type 4	(96LED 4)		
96 watt LED Type 5	(96LED 5)		

Squareline HID luminaire	Wattage Distribution	LED Color	Voltage
RK-SQL			
120 watt LED Type 2	(120LED 2)	4000K	MT (120-277) 347 480
120 watt LED Type 3	(120LED 3)		
120 watt LED Type 4	(120LED 4)		
120 watt LED Type 5	(120LED 5)		
150 watt LED Type 2	(120LED 2)	4000K	MT (120-277) 347 480
150 watt LED Type 3	(120LED 3)		
150 watt LED Type 4	(120LED 4)		
150 watt LED Type 5	(120LED 5)		
180 watt LED Type 2	(180LED 2)	4000K	MT (120-277) 347 480
180 watt LED Type 3	(180LED 3)		
180 watt LED Type 4	(180LED 4)		
180 watt LED Type 5	(180LED 5)		



Pappi Lighting

5939 Wallace, St.
Mississauga, ON
Canada L4Z 1Z8
tel: (905) 625-1139
tel: (888) 453-1139
fax: (866) 720-3015
www.pappilighting.com